

HARVIA THE WALL

HSWE450400

Harvia The Wall heater was created with a focus on functionality. Easy installation, and durable structure make The Wall heater versatile in its features. The model E sauna heater is controlled by a separate control unit.

Advantages

- Compact, stylish and reliable heater for medium-sized sauna rooms
- The space-saving heater fits in a great variety of saunas
- Controlled by a separate control unit
- Option to integrate heater in sauna bench
- Durable structure and technical features extend heaters lifespan



Features

Main material : Steel


H x W x D : 610.0 x 380.0 x 260.0 mm

Net weight (kg) : 10.0

Installation location : Wall

ID	GTIN	Output (kW)	Sauna room size min - max m3
HSWE450400	6410082660285	4.5 kW	3.0-6.0

Related products




SFE-220400



HSW5



HSW5L



HSW1



HSW5



Spare parts

Product	ID	Pcs
Heating element, The Wall 1500W / 230V	Y10-0016	1
Wall mounting bracket, Wall all models	ZWA-058	1
Grid for The Wall heater	ZWA-023	1
The Wall E, Air flow spoiler	ZWA-059	1
Heating element support for Wall E/Combi	ZWA-077	1
Heating element support The Wall E/Combi, AlZn	SPZWA-077	
Grid, The Wall heater	SPZWA-023	
Heating element 1500W 230V	SPY10-0016	3

Technical details

Technical data	Type / attribute	HSWE450400
	Color	Stainless Steel
	Power output	4.5 kW
	Stone sizes	Ø5–10 cm
	Stone amount (kg)	20
Dimensions	Product width	380
	Product height	610
	Product depth (mm)	260
	Net weight (kg)	10
	Gross weight	11.7
	Package width	460
	Package height	533
	Package depth	264
Safety and installation dimensions	Safety distance front (non-combustible materials)	20
	Safety distance front (combustible materials)	20
	Safety distance right side (combustible materials)	40
	Safety distance right side non-combustible materials	40
	Safety distance left side (combustible materials)	40
	Safety distance left side non-combustible materials	40
	Safety distance side (non-combustible materials)	35
	safety distance to the side wall (combustible materials)	35
	Safety distance (Ceiling)	1200
	Room min. height(depends on connections and therefore from output, star/delta)	1900
	Installation opening height	1900
	Installation opening width	450
	Installation opening depth	280

Technical images



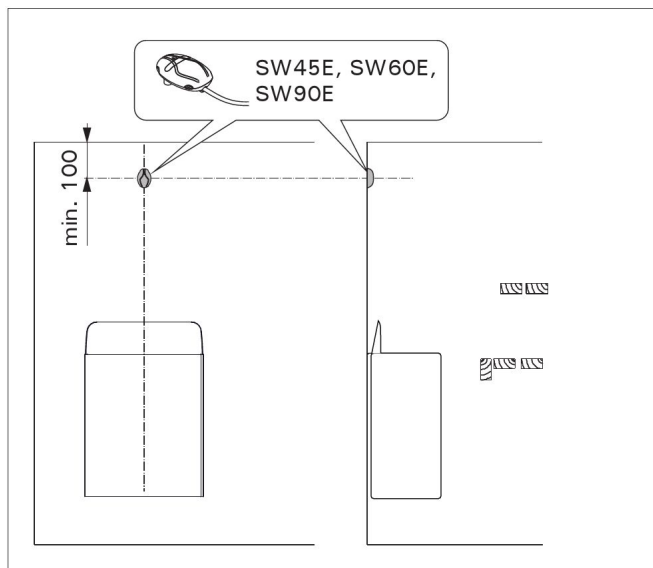


Figure 6. Installing the sensor (all dimensions in millimeters)

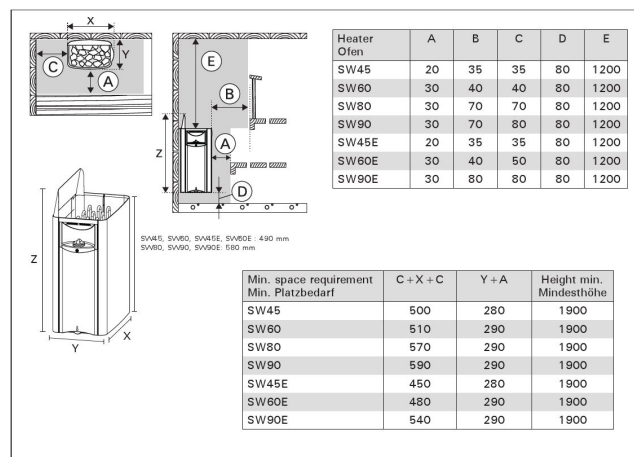


Minimum safety distances (all measurements in millimeters)

30

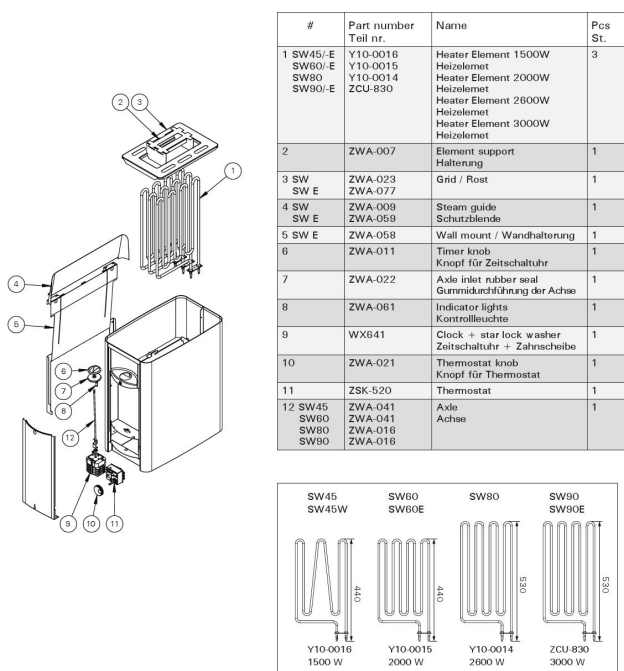

We recommend to use only the manufacturer's spare parts.

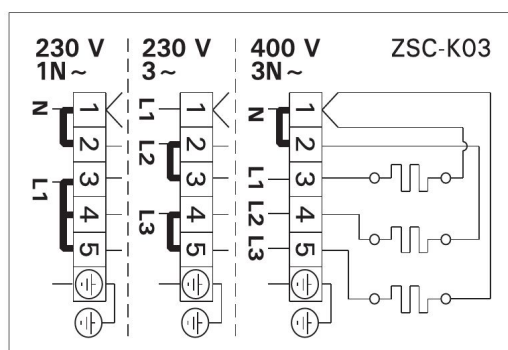

Heater Ofen	400V 3N~		230V 1N~	
	Fuses Sicherungen A	Power cable Anschlusskabel H07RN-F min. mm ²	Fuses Sicherungen A	Power cable Anschlusskabel H07RN-F min. mm ²
SW45E	3 x 10	5 x 1,5	25	6
SW60E	3 x 10	5 x 1,5	35	10
SW90E	3 x 16	5 x 2,5	50	10

Electrical connections (SW45E, SW60E, SW90E)